




Suspension Hardware For ADSS Optical Fiber
ADSS hardware

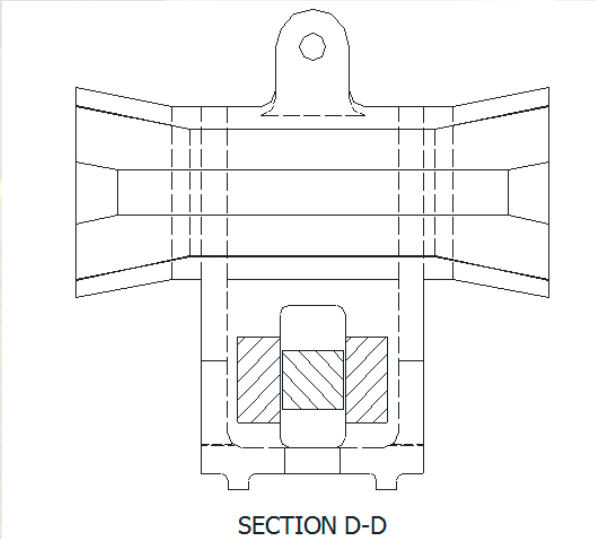

Suspension Hardware ADSS, Lightweight, corrosion resistant and quick installation, can be installed with through bolt and / or stainless steel strip. The scope of application is: aerial, wall-mounting, pole.

P/N°	Diameter Range (mm)		Diameter Range (in)		Weght (Kg)
	Min.	Max.	Min.	Max.	
TC-ASCFO-1205	10.67	12.05	0.420"	0.474"	.750
TC-ASCFO-1334	12.07	13.34	0.475"	0.525"	
TC-ASCFO-1461	13.36	14.61	0.526"	0.575"	
TC-ASCFO-1558	14.63	15.88	0.576"	0.625"	
TC-ASCFO-1715	15.90	17.15	0.626"	0.675"	
TC-ASCFO-1842	17.17	18.42	0.676"	0.725"	
TC-ASCFO-1969	18.44	19.69	0.726"	0.775"	
TC-ASCFO-2096	19.71	20.96	0.776"	0.825"	
TC-ASCFO-2223	20.98	22.23	0.826"	0.875"	
TC-ASCFO-2350	22.25	23.50	0.876"	0.925"	